

Double-Ended Beam Load Cell

FEATURES

- Capacities: 5k to 150k lbs
- Low-profile construction
- Stainless-steel construction
- Certified to NTEP class III, 10000 divisions
- Sealing: IP67 (DIN 40.050)
- **Optional**
 - FM Approved and ATEX & UKCA certified versions for use in potentially-explosive atmospheres
 - EDOC option available; product appearance will differ from the photograph due to coating



APPLICATIONS

- Platform scales
- On-board weighing
- Weighbridges
- Silo hopper weighing

This product is suitable for tank weighing systems, low-cost weighbridges and axle weighers.


A reliable sealing is ensured by the proprietary TRANSEAL potting compound and additional mechanical protection of the strain gage area.

DESCRIPTION

Model 9103 is a double-ended, center-loaded shear beam type load cell constructed of stainless steel.

A specially-designed mounting arrangement is available, providing the ideal solution for vessel/tank weighing.

OUTLINE DIMENSIONS in millimeters

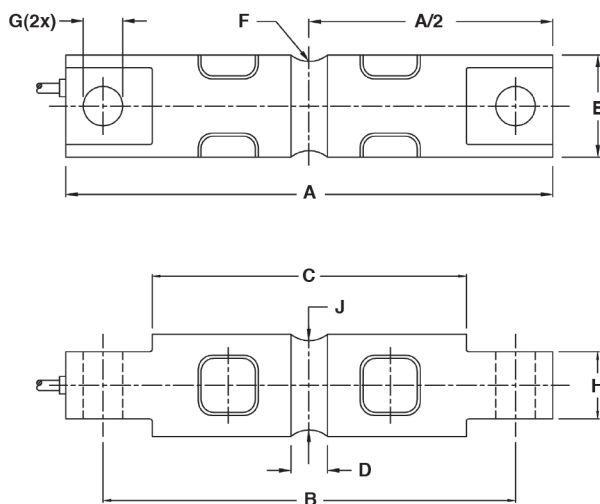

Cable specifications

Cable length: 10 m (6 m for 5–20k)

Excitation +	Red
Excitation -	Black
Output +	Green
Output -	White
Shield	Transparent

Cable screen is not connected to the load cell body.

Capacity (lbs)	5k, 10k	20k	30-60k	100k	150k
A	206.2	206.2	260.4	285.8	285.8
B	174.6	174.6	215.9	241.3	241.3
C	133.1	133.1	165.1	190.5	190.5
D	15.7	21.3	25.4	31.8	31.8
E	43.2	49.5	76.2	88.9	99.1
F	12.7	12.7	25.4	38.1	38.1
G	16.7	16.7	26.9	26.9	26.9
H	28.4	28.4	60.2	63.5	71.1
J	37.6	37.6	69.3	82.3	92.5

Above dimensions apply to non-EDOC-coated load cells.

Double-Ended Beam Load Cell

SPECIFICATIONS			
PARAMETER	VALUE		UNIT
Standard capacities (E_{max})	5k*, 10k, 20k, 30k, 40k, 50k, 60k, 100k, 150k*		lbs
Metric equivalents	2.3*, 4.5, 9.1, 13.6, 18.2, 22.7, 27.2, 45.4, 68*		t
Accuracy class according to NTEP	NTEP III L	Non-Approved	
Maximum no. of verification intervals (n_{ic})	10000		
Rated output (=S)	3.0		mV/V
Rated output tolerance	0.003		±mV/V
Zero balance	2.0		±% FSO
Combined error	0.0200	0.1000	±% FSO
Non-repeatability	0.0100	0.0200	±% FSO
Minimum dead load output return	0.015	0.0500	±% applied load
Creep error (30 minutes)		0.0600	±% applied load
Creep error (20–30 minutes)		0.0200	±% applied load
Temperature effect on minimum dead load output	(0.0008)	(0.0140)	±% FSO/°F (/5°C)
Temperature effect on sensitivity	0.0010	(0.0070)	±% applied load/°F (/5°C)
Minimum dead load	0		% E_{max}
Maximum safe overload	150		% E_{max}
Ultimate overload	300		% E_{max}
Maximum safe side load	100		% E_{max}
Deflection at E_{max}	0.5/0.6/1.1/0.5/0.5/0.5/0.6/0.5/0.5/0.9/0.9		mm
Excitation voltage	5 to 12		V
Maximum excitation voltage	15		V
Input resistance	700±7		Ω
Output resistance	700±7		Ω
Insulation resistance	≥5000		MΩ
Compensated temperature range	-10 to +40		°C
Operating temperature range	-40 to +80		°C
Storage temperature range	-40 to +90		°C
Element material (DIN)	Stainless steel		
Sealing (DIN 40.050 / EN60.529)	IP67		
Recommended torque on fixation bolts	12 to 14		N*m

* Capacities 5k and 150k lbs are not approved by NTEP

FSO—Full Scale Output

All specifications subject to change without notice.

CERTIFICATION MARKINGS

ATEX & UKEX Markings (For Zone 1, 2 and Zone 21, 22)

II 2 G Ex ib IIC T6...T4 Gb
 II 2 D Ex ib IIIC T70°C Db
 II 2 D Ex tb IIIC T70°C Db

II 3 G Ex ic IIC T6...T4 Gc or Ex nA IIC T6...T4 Gc
 II 3 D Ex ic IIIC T70°C Dc or Ex tc IIIC T70°C Dc

FM Approval Markings (USA and Canada)

IS Class I, II, III, Division 1, Groups A, B, C, D, E, F and G;
 NI Class I, Division 2, Groups A, B, C, and D;
 DIP Class II, III, Division 2, Groups F and G;
 T4;
 Ta = -25°C to +40°C;